

Aesculap® Targon® PFT

Operative procedure

Opening up



Preparing the nail bed



Mounting and inserting the nail



Fine adjustment depth and axial



Opening up the lateral cortical wall




Positioning the guide pin



Measuring the length of the TeleScrew against drill sleeve



Drilling for TeleScrew drill bit remains in place

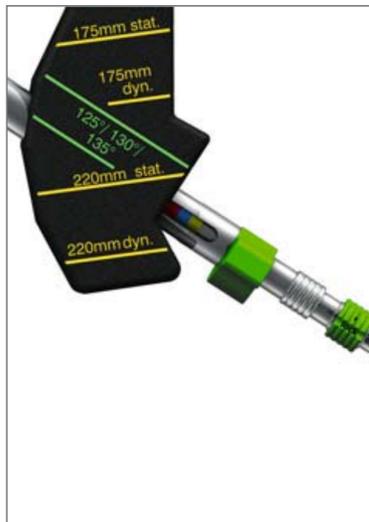

Countersinking the antirotation pin



Drilling for antirotation pin



Inserting the antirotation pin



Tapping (optional), inserting and extending the TeleScrew



Distal locking: Countersinking, drilling, locking



Inserting the cap screw

